

# DEVILBISS PRI PRO LITE

*The all purpose Compliant primer spray gun*

DeVilbiss PRi Pro Lite – the ultimate in primer spray gun technology.

**DEVILBISS**



The PRi Pro Lite is a mid sized compliant gravity feed spray gun specifically designed for the application of modern primers, surfacer's and fillers. The gun is easy to clean and maintain with most of the service parts shared with the existing GTi Pro Lite range of guns. A wide range of five fluid tips and one new air cap ensure the PRi Pro Lite is the perfect solution for all priming applications.

The all new PR10 primer air cap incorporates the latest DeVilbiss Trans-Tech atomisation technology for total compliance with EPA regulations. Primer guns must be compliant in their own right. The PR10 air cap is manufactured in plated brass for ultimate durability.

#### **Typical applications**

- Aerospace and defence
- General Industry
- Truck and Vehicle Manufacturing
- Railway and Rolling Stock

#### **Suitable for these materials**

- Solvent based and water based coatings
- High build primers
- Surface primers

---

Large spray patterns and even material distribution

---

Suitable for all types of primers, surfacers, fillers and polyesters

---

Air adjuster valve on the gun handle allows instant pressure control

---

Balanced air valve design for lighter trigger pull and improved air flow

---

Tough and durable drop forged aluminium gun body

---

Paint cup includes integral filter and drip-check lid

**PRi Pro**  
**L I T E**

carlisleleft.com



**PRi Pro Lite Compliant Trans-Tech Spray Gun**

The PRi Pro Lite gun is constructed of the very highest grade alloys and stainless steels to ensure smooth operation as well as high impact resistance.

Every single component within the PRi Pro Lite spray gun is quality controlled and machined parts are checked to exacting tolerances.

**Example of PRi Pro Lite spray gun part numbering:**

**PRILT-GPR10-14 means...**

PRILT-G = PRi Pro Lite Gravity Gun

PR10 = PR10 Air cap

14 = 1.4 fluid tip and needle.

PRi Pro Lite Gravity Fluid Tip/ Needle (.mm) size and code: 1.4, 1.6, 1.8, 2.0, 2.5.

Air Cap Number and Type	Recommended Inlet Pressure	Air Flow @ 2 bar/29 psi
PR10 – Trans-Tech Compliant	2 bar (29psi)	300 l/min (11 scfm)


Specifications	PRi Pro Lite
Air Connection	1/4" Universal
Gun Weight (without cup)	446g



Gravity cup  
pt. no. GFC-501



Gravity cup (Blue polyester)  
pt. no. GFC-511 for difficult fluids.

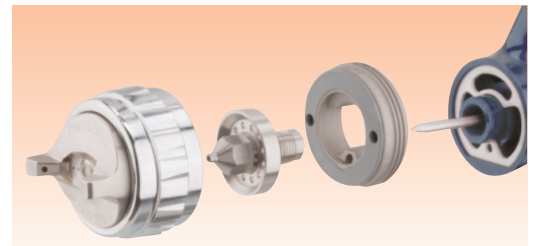

For further technical information refer to the DeVilbiss PRi Pro Lite Service Bulletins.

**Sales and Service through our Global Network of Distributors**

Carlisle Fluid Technologies Locations

Americas: **USA ▪ Mexico ▪ Brazil**

Europe/Asia/Africa: **United Kingdom ▪ France ▪ Germany ▪ Switzerland ▪ India**

Pacific Rim: **China ▪ Japan ▪ Australia**

**DeVILBISS**

www.carlisleft.com

email: marketing@carlisleft.eu

