


DEVILBISS SRI PRO LITE

Fine finish spray gun

A fine finish spray gun to provide ultra sensitive fan pattern control with the comfort of a full-size spray gun.

DEVILBISS

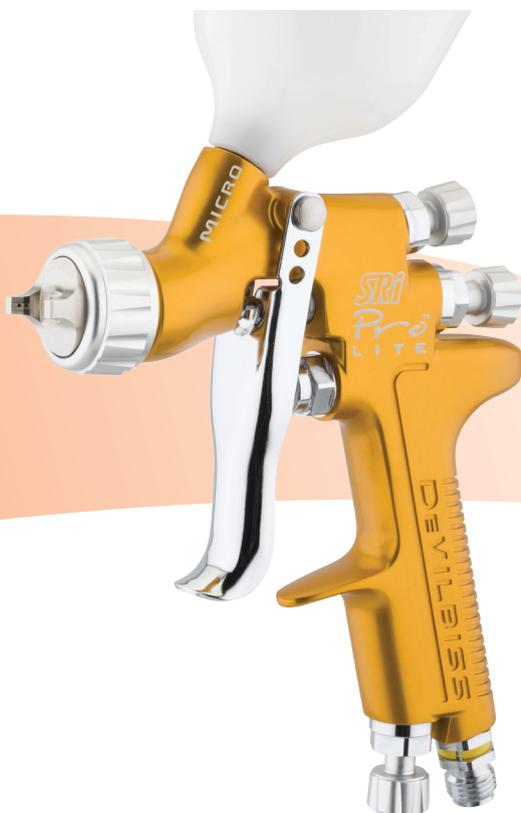

The Devilbiss SRI Pro Lite is the ultimate fine finish spray gun providing superb feathering control combined with the pattern range and versatility needed for top quality fine finishing including spot repairs, shading and stencilling, whilst providing excellent comfort stability, balance and delicacy of control.

A new edition to the range is the SRI Pro Lite Micro which has been custom built for the high precision techniques used in the growing field of micro repairs.

Typical applications

- Fine shading
- Retouching
- Stencilling
- Spot repair
- Reworking

Suitable for these materials

- Solvents and water based paints
- Stains and varnishes
- Inks and dyes
- Lacquers

A small scale fine finish spray gun with many practical uses throughout general industry, ergonomically styled for comfort

Choice of HVLP or Trans-Tech® Compliant air caps provide superb atomisation of both solvent and waterbased materials

Stainless steel fluid tips & needles

Balanced air valve design for lighter trigger pull and improved air flow

Lightweight, strong, cast aluminium gun body

SRI is supplied as standard with a quality screw top gravity feed cup with 125 mls capacity

Optional inexpensive semi-disposable cups are available

SRI Pro
LITE

carlisleft.com



SRI Pro Lite Compliant Trans-Tech Spray Gun

The SRI Pro Lite gun is constructed of the very highest grade alloys and stainless steels to ensure smooth operation as well as high impact resistance. Every single component within the SRI Pro Lite spray gun is quality controlled and machined parts are checked to exacting tolerances.

Example of SRI Pro Lite spray gun part numbering:

SRIPROL-TE5-08 means...

- SRIPROL = SRI Pro Lite Gravity Gun
- TE5 = TE5 Air cap
- 08 = 0.8 fluid tip and needle



Kit contents are spray gun c/w selected air cap and tip set up, gravity cup, pouring funnel, spanner, torx key and cleaning brushes.

SRI Pro Lite Gravity Fluid Tip/ Needle (mm) sizes and code:
0.6, 0.8, 1.0, 1.2, 1.4

Air Cap and Type	Air Consumption (L/min)	Recommended Air Inlet Pressure
TE5 High Efficiency	100 (3.5 cfm)	2 Bar (29 psi)
HV5 HVLP	135 (4.8 cfm)	2 Bar (29 psi)
RS1 Round Spray	55 (1.9 cfm)	2 Bar (29 psi)
MC1 High Efficiency	50 (1.8 cfm)	1 Bar (14.5 psi)

Note: MC1 Air Cap is designed only to be used with the 0.6mm Fluid Tip.

Specifications	SRI Pro Lite
Air Connection	1/4" Universal
Gun Weight (without cup)	455g

For further technical information refer to the DeVilbiss SRI Pro Lite Pro Lite Service Bulletins.

Sales and Service through our Global Network of Distributors

Carlisle Fluid Technologies Locations

- Americas: **USA ■ Mexico ■ Brazil**
- Europe/Asia/Africa: **United Kingdom ■ France ■ Germany ■ Switzerland ■ India**
- Pacific Rim: **China ■ Japan ■ Australia**

DEVILBISS

www.CarlisleFT.com

email: marketing@CarlisleFT.eu

